


Power Supply Crimp-Rast Buchsengehäuse, RM 5,08mm Power Supply Friction-Lock Female Housings, 5.08mm Pitch




Technische Daten / Technical Data

Isolierkörper	Thermoplastischer Kunststoff, nach UL94 V-0 (UL94 V-2 auf Anfrage)
Insulator	Thermoplastic, rated UL94 V-0 (UL94 V-2 on request)
Kontaktmaterial	Kupferlegierung
Contact Material	Copper alloy
Aderquerschnitt	AWG 18 ... 24
Applicable wire Gauge	AWG 18 ... 24
Durchgangswiderstand	< 20mΩ
Contact Resistance	< 20mΩ
Isolationswiderstand	> 1000MΩ
Insulation Resistance	> 1000MΩ
Spannungsfestigkeit	1000V _{AC}
Test Voltage	1000V _{AC}
Nennspannung	350V _{DC} max.
Voltage Rating	350V _{DC} max.
Nennstrom	bis zu 10A
Current Rating	up to 10A
Temperaturbereich	-25°C ... +85°C
Temperature Range	-25°C ... +85°C

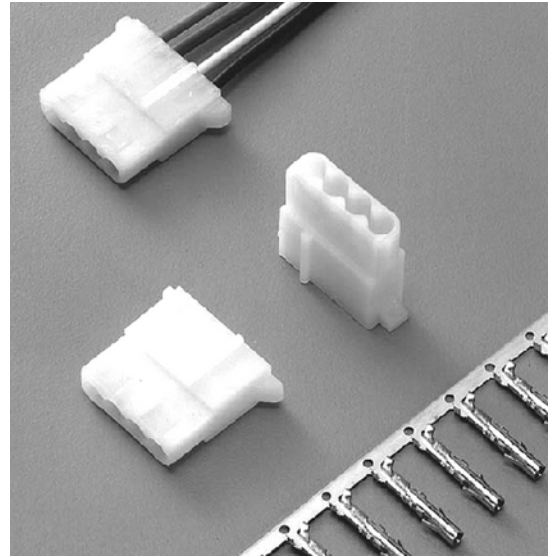

© W+P PRODUCTS

Passende Gegenstecker:
Mate with connectors:
538

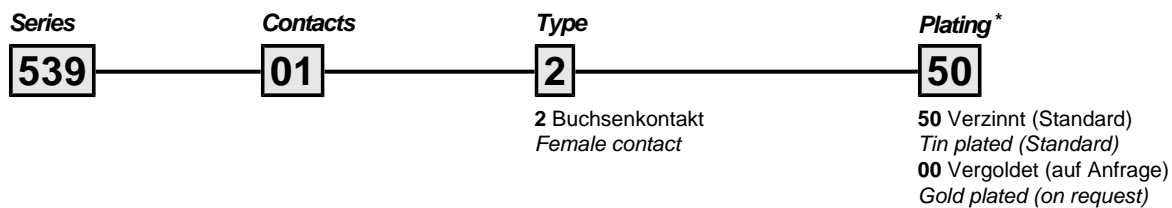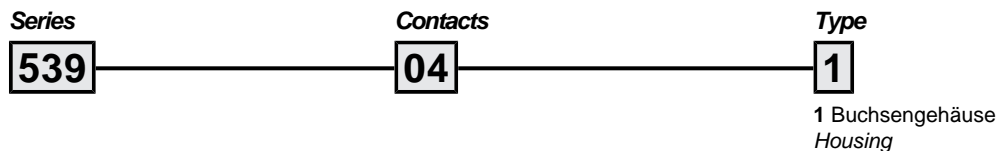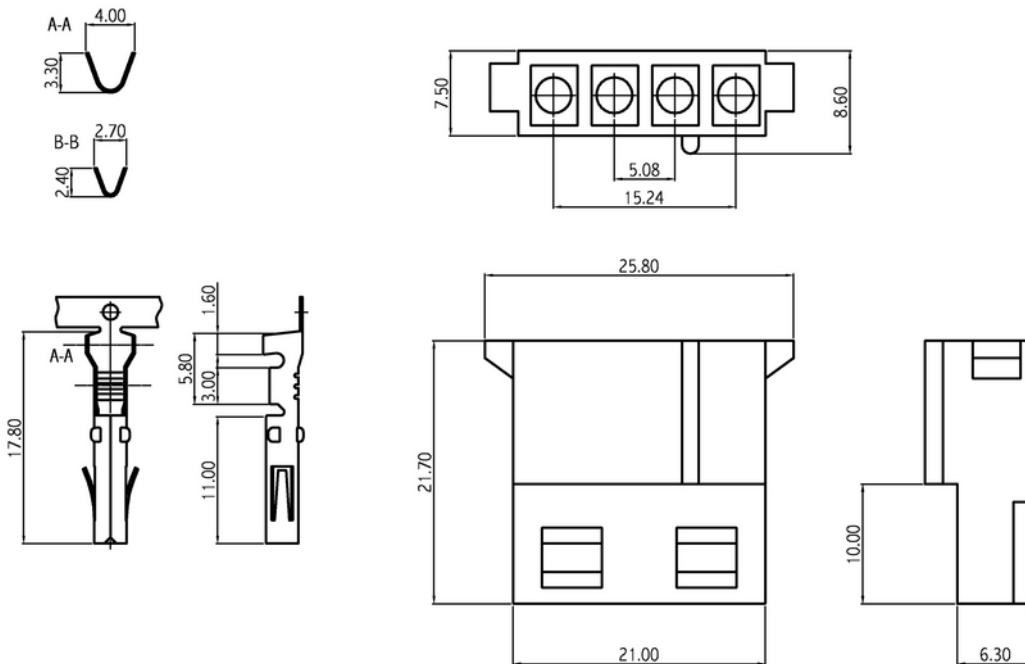

* Dies ist ein **Bestellbeispiel** -
bitte durch Ihre Spezifikationen ersetzen.
* This is an **order example** -
please replace by your specifications.