

**Technische Daten / Technical Data**

Durchgangswiderstand	< 30m $\Omega$
Contact Resistance	< 30m $\Omega$
Isolationswiderstand	> 1000M $\Omega$
Insulation Resistance	> 1000M $\Omega$
Spannungsfestigkeit	500V <sub>AC</sub>
Test Voltage	500V <sub>AC</sub>
Nennspannung	30V <sub>RMS</sub>
Voltage Rating	30V <sub>RMS</sub>
Nennstrom	1,5A bei 25°C
Current Rating	1,5A at 25°C
Temperaturbereich	0°C ... +70°C
Temperature Range	0°C ... +70°C


Doppelt geschirmt  
 Double shielded  
 UL 2725




© W+P PRODUCTS

In schwarz und grau erhältlich  
 Available in black and grey  
 Weitere Farben auf Anfrage  
 More colours on request


Type 1: USB A male - USB A male

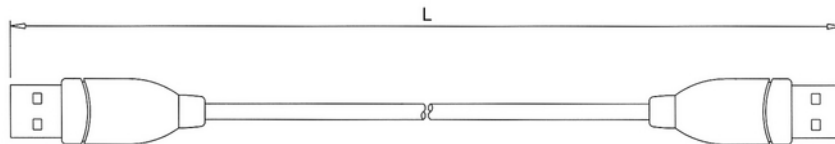


Type 2: USB A male - USB B male

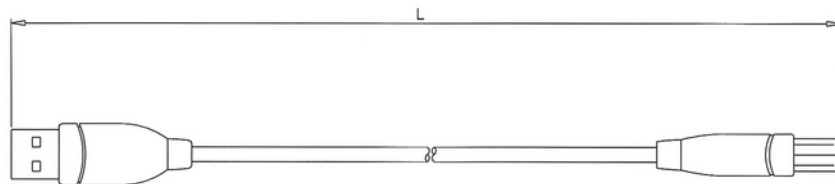

Type 3: USB B male - USB B male




Type 4: USB A male - Mini-USB B male

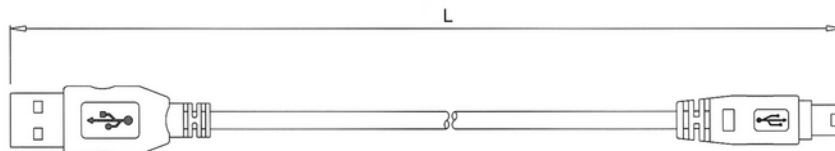


# 826

## USB / Mini-USB / Micro-USB Kabelkonfektionen USB / Mini-USB / Micro-USB Cable Assemblies


Type 5: USB A male - USB A female

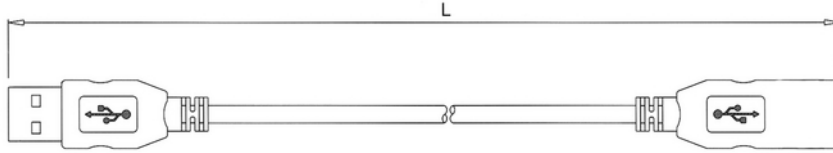


Type 6: Mini-USB A male - Mini-USB B male

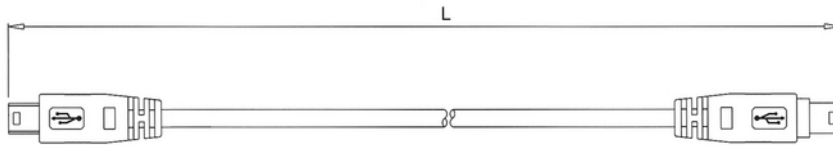

Type 7: USB B male - Micro-USB A male



Type 8: Micro-USB B male - Micro-USB B male



Series

826

Type\*

1

Length (L)\*

100

- 1 USB A (male) <=> USB A (male)
- 2 USB A (male) <=> USB B (male)
- 3 USB B (male) <=> USB B (male)
- 4 USB A (male) <=> Mini-USB B (05 contacts, male)
- 5 USB A (male) <=> USB A (female)
- 6 Mini-USB A (male) <=> Mini-USB B (male)
- 7 USB B (male) <=> Micro-USB A (male)
- 8 Micro-USB B (male) <=> Micro-USB B (male)

050 0,5m

100 1,0m

200 2,0m

300 3,0m

500 5,0m

\* Dies ist ein **Bestellbeispiel** -  
bitte durch Ihre Spezifikationen ersetzen.

\* This is an **order example** -  
please replace by your specifications.

TEL +49 5223 98507-0  
FAX +49 5223 98507-50

**W+P PRODUCTS**

E-MAIL sales@wppro.com  
WEBSITE www.wppro.com