








Technische Daten / Technical Data:

Kontaktmaterial	Kontakt für Vierkantstift □ 0,635 mm, CuZn 30
Contact Material	Contact for Square Pin □ 0,635 mm, CuZn 30
Kontaktoberfläche	Kupfer flash, Nickel, 0,25 µm Gold
Contact Surface	Copper flash, nickel, 0,25 µm gold
Durchgangswiderstand	≤ 7 mOhm
Contact Resistance	≤ 7 mOhm
Nennstrom	3 A
Current Rating	3 A

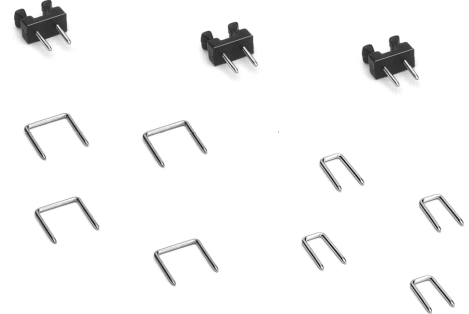

© W+P PRODUCTS

B



Series	Dip Spacing*	Plating	Latch*
166	10	10	0
	10 = 2,54 mm 20 = 5,08 mm 30 = 7,62 mm	10 = 0,25 µm Gold 0,25 µm gold plated	0 = ohne Griffflasche w/o latch 1 = mit Griffflasche with latch

(* Bestellbeispiel - Bitte durch Ihre Spezifikationen ersetzen.
* Order example - To be replaced by your specifications.)