


# 356

## Flachbandkabel - RM 1,27 mm / 1,00 mm / 0,635 mm

Flat Cable - Pitch 1,27 mm / 1,00 mm / 0,635 mm

### Technische Daten / Technical Data:

	Pitch 1,27 AWG 26	Pitch 1,00/1,27 AWG 28	Pitch 0,635 AWG 30
UL-Style	2651	2651	2678
UL-Style	2651	2651	2678
Anzahl der Litzen pro Leiterbahn No. of Strands in each Conductor	7	7	7
Leiterwiderstand Conductor Resistance	148 Ohm/km	237 Ohm/km	377 Ohm/km
Isolationswiderstand Insulation Resistance	$\geq 10^9$ Ohm	$\geq 10^9$ Ohm	$\geq 10^9$ Ohm
Spannungsfestigkeit Test Voltage	2500 V <sub>RMS</sub>	2500 V <sub>RMS</sub>	1500 V <sub>RMS</sub>
Betriebsspannung Rating Voltage	300 V <sub>RMS</sub>	300 V <sub>RMS</sub>	150 V <sub>RMS</sub>
Temperaturbereich Temperature Range	-40°C...+105°C	-40°C...+105°C	-40°C...+105°C

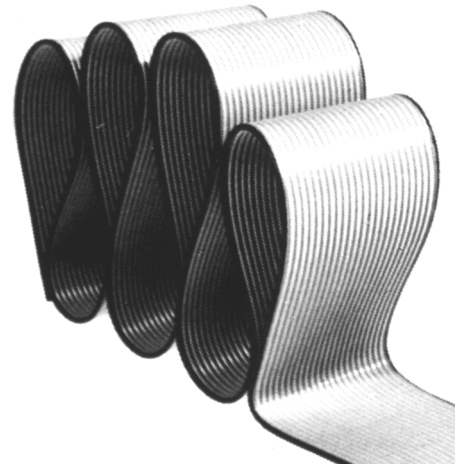

© W+P PRODUCTS



Series	Type*	Cable Diameter*	Contacts*
<b>356</b>	<b>1</b>	<b>287</b>	<b>26</b>
	1 = Raster 1,27, grau Pitch 1,27, grey	267 = AWG 26 (7) 287 = AWG 28 (7) (Standard)	06-64-pol.
	2 = Raster 1,27, bunt Pitch 1,27, multicoloured	267 = AWG 26 (7) 287 = AWG 28 (7) (Standard)	
	3 = Raster 1,00, grau Pitch 1,00, grey	287 = AWG 28 (7)	
	4 = Raster 0,635, grau Pitch 0,635, grey	307 = AWG 30 (7)	

(\* Bestellbeispiel - Bitte durch Ihre Spezifikationen ersetzen.

\* Order example - To be replaced by your specifications. )

TEL.: +49 5223 98507-0  
FAX : +49 5223 98507-50

**W+P PRODUCTS**

E-MAIL: sales@wpro.com  
INTERNET: www.wpro.com