

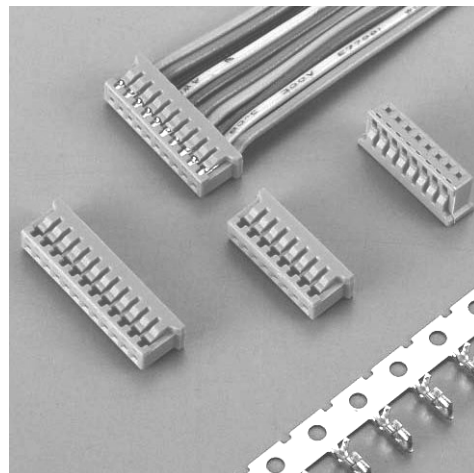


#### Technische Daten / Technical Data:

Isolierkörper	Thermoplastischer Kunststoff, nach UL94V0
Insulator	Thermoplastic, rated UL94V0
Kontaktmaterial	Messing, verzinkt
Contact Material	Brass, tin plated
Kabeldurchmesser	AWG 28-32
Applicable wire	AWG 28-32
Lötbarkeit	IEC512-12A
Solderability	IEC512-12A
Durchgangswiderstand	≤ 20 mOhm
Contact Resistance	≤ 20 mOhm
Isolationswiderstand	> 5x10 <sup>8</sup> Ohm
Insulation Resistance	> 5x10 <sup>8</sup> Ohm
Spannungsfestigkeit	500 V <sub>AC</sub>
Test Voltage	500 V <sub>AC</sub>
Nennspannung	100 V <sub>AC/DC</sub> max.
Current Voltage	100 V <sub>AC/DC</sub> max.
Nennstrom	1 A
Current Rating	1 A
Temperaturbereich	-25°C...+85°C
Temperature Range	-25°C...+85°C

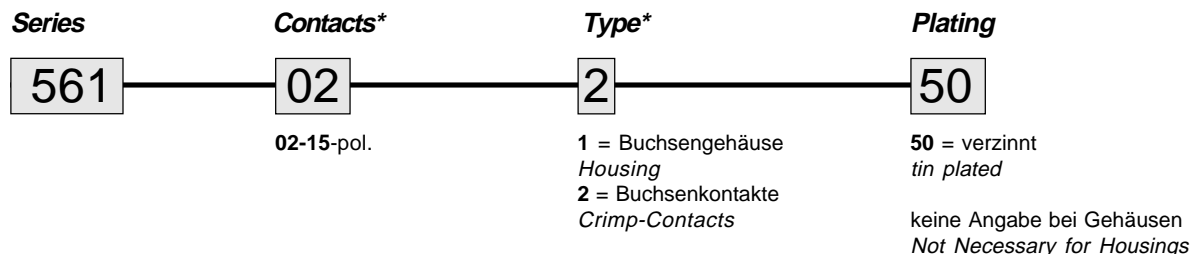

© W+P PRODUCTS

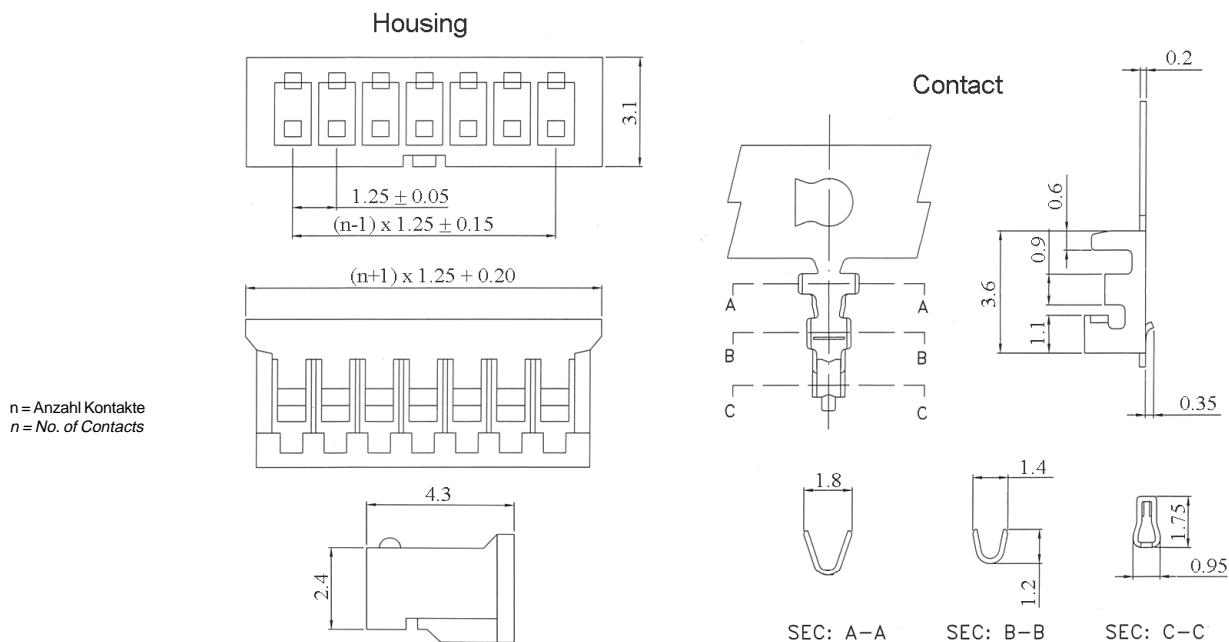

(\* Bestellbeispiel - Bitte durch Ihre Spezifikationen ersetzen.  
\* Order example - To be replaced by your specifications.)